

How to buy Meter Man

Go to webpage

<http://www.supremepiano.com/product/meter.htm>

You can pay through paypal there.

If you need other payment, please feel free to contact support@soundemon.com

Register Meter Man

Meter Man must be registered before it could sound.

You have to enter keycode into the text box.

First, please find the text box named Enter Your KeyCode Here



* Enter Your KeyCode Here *

Then paste the keycode into the box



%'REgP7'.vRY=gcl!WR#%m'pd5\TM*u(.kL;

Press Enter, you will see Authorized to XXXXXXXX



Authorised to Wang Yichi@Beijing

If the text box still shows the keycode, it means the keycode is not correct, You need to contact customer service to get a new keycode. Please note 95% of the failures are caused by copy one more space at the beginning or the end of the keycode.

What if YOU enter the keycode incorrectly?

The only solution for this problem is for the customer to delete the Windows Registry Entry.

Click "Start" on the windows desktop.

Click "Run" and type in 'regedit' then press enter. A window will appear.

Click the 'Edit' tab and select 'Find...' and type in "SP2Addons "then press enter.

Right click on the folder highlighted in the Left window and select 'Delete' and click 'Yes' to confirm to delete this item.

Close the window.

Load the VST and it should show " *Enter Your KeyCode Here * "

If it does not show this message you should follow the above procedure again taking care to follow every step.

Function overview



A: Clipping/Overs indicators

B: Attack time of the meter, ranging from 0ms to 100ms, when setting it to 0ms, it could catch the transient peak.

C: Decay time of the meter, ranging from 0ms to 500ms

D: hold time of the meter, ranging from 0ms to 1000ms. This setting determines how long the meter holds the peak signal.


E: Windows time of the meter, only effective when setting Metering Type to windows

F: Metering Type, Select three modes, Non-linear, Linear and Windows

G: Overs Detection, select the ways of detects overs, from 1 sample to 5 samples. This function is useful when you want to detect inter-sample peaks. Or your monitor system has larger headroom.

H: Meter Type, Switch different meter display, Classic is the traditional peak meter we are familiar with, K-12, K-14 and K-20 are the new K System meters.

I: Weighting Types: Select different weighting filters apply to the signal

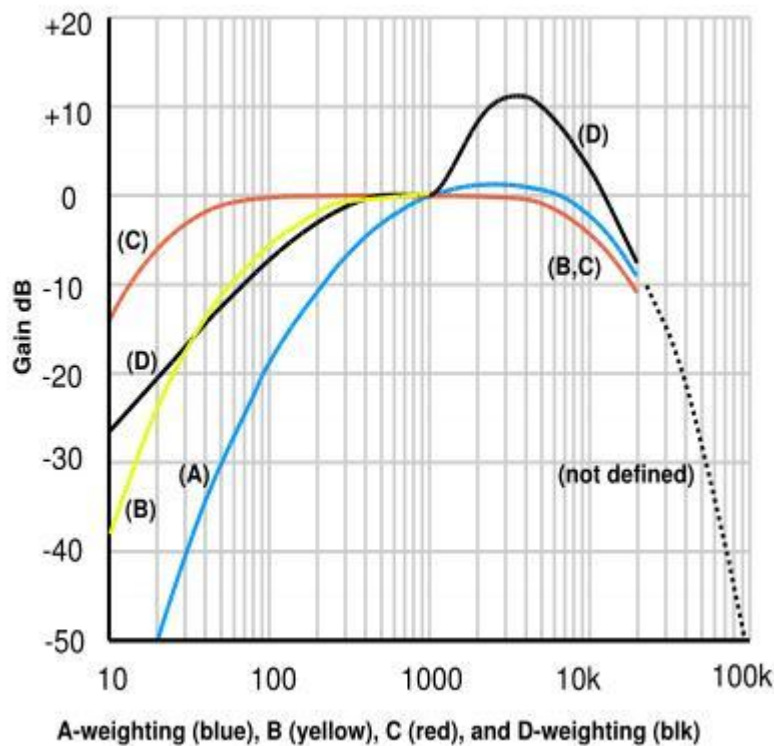

J: Peak Value display, it will display the hold peak value here, up to the first three digits after the decimal point.

K: Peak Meter

L: RMS Meter

M: Register Box

Customer Support

To reach us, you can Email directly to support@soundemon.com. Or go to our website the look for information

Our company main website

<http://www.soundemon.com>

AIR and other addons locate with other Sound Magic pianos at

<http://www.supremepiano.com>