


Neo Plasma

Multi Delay with Plasma Collision System



Developed by

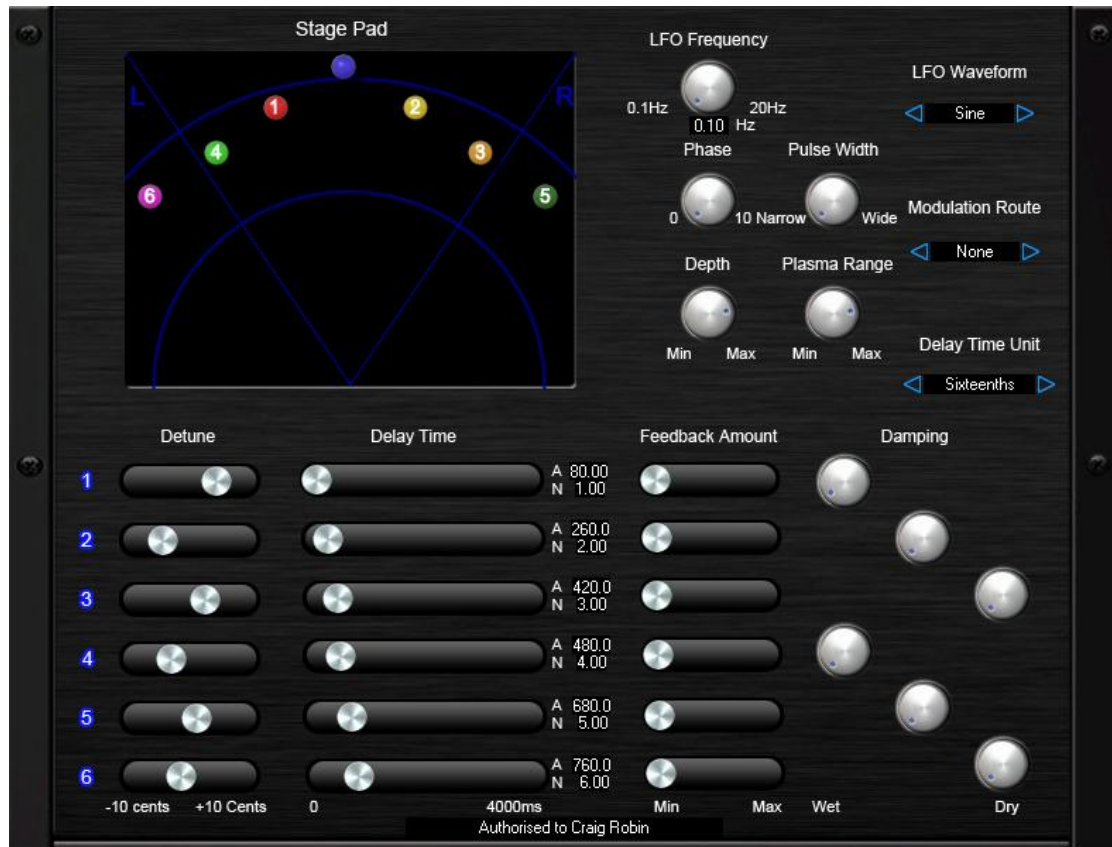

Operational Manual

The information in this document is subject to change without notice and does not present a commitment by Sound Magic Co. Ltd. The software described in this document is subject to a License Agreement and may not be copied to other media. No part of this publication may be copied, reproduced or recorded, for any purpose, without prior written permission by Sound Magic Co. Ltd. All product and company names are trademarks of their respective owners.

Sound Magic Co. Ltd

<http://www.supremepiano.com>

<http://www.soundemon.com>

support@soundemon.com

206, Min 4, People Daily, ChaoYang, Beijing

P.R.China

Version 1.0

Register Neo Plasma

Neo Plasma must be registered before it could sound.

You have to enter keycode into the text box.

First, please find the text box named Enter Your KeyCode Here

`* Enter Your KeyCode Here *`

Then paste the keycode into the box

`%'REgP7'.vRY=gc!WR#%m'pd5\TM*u(.kJ;`

Press Enter, you will see Authorized to XXXXXXXX

`Authorised to Wang Yichi@Beijing`

If the text box still shows the keycode, it means the keycode is not correct, You need to contact customer service to get a new keycode. Please note 95% of the failures are caused by copy one more space at the beginning or the end of the keycode.

What if YOU enter the keycode incorrectly?

The only solution for this problem is for the customer to delete the Windows Registry Entry.

Click "Start" on the windows desktop.

Click "Run" and type in 'regedit' then press enter. A window will appear.

Click the 'Edit' tab and select 'Find...' and type in "NEOMIXING "then press enter.

Right click on the folder highlighted in the Left window and select 'Delete' and click 'Yes' to confirm to delete this item.

Close the window.

Load the VST and it should show " *Enter Your KeyCode Here * "

If it does not show this message you should follow the above procedure again taking care to follow every step.

Controls

Detune: Pitch Variation of the voice

Delay Time: Sets the delay time, ranging from 0 ms to 4 seconds. There is another parametric called Delay Time Unit, which controls the unit of the time

Feedback Amount: Sets the feedback amount of the voice

Damping: The damping amount of the voice

LFO Frequency: Set LFO Frequency here

Phase: The phase of the LFO waveform

Pulse Width: The Pulse Width of the LFO waveform

Depth: The modulation depth of the LFO

Plasma Range: The variation of the Plasma system for each voice

LFO Waveform: Choose different waveform for LFO

Modulation Route: Decide which parametric you want to modulation, pitch, feedback or delay time.

Delay Time Unit: When under actual time mode, you can select actual time by ms. Otherwise you can only choose the note duration of the delay time

Stage Pad

X-Axis: Horizontal Axis. Decide the panning of the voice

Y-Axis: Vertical Axis. Decide the volume of the voice, ranging from 0dB to -60dB